

# THE ULTIMATE




## LIVE FLOOR TRANSPORT

Empties Entire Load in 8 to 12 Minutes

Peerless trailers' light-weight construction offers greater payloads, and the standard mitered front-end cuts wind resistance and fuel costs.




Peerless offers wet kits for the live floor transport. They include a PTO unit and a hydraulic pump to power the live floor drive when necessary.

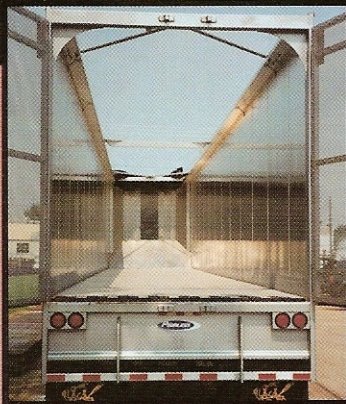

All 24 channels move ten inches to the rear to unload; then every third channel sequentially retracts until all are in original position, ready to move ten inches to the rear again. They slide on polyethylene bearings located at each cross member and all across the wheel wells.



I-Beams provide the support for capacity loads while keeping trailer weight at a minimum.

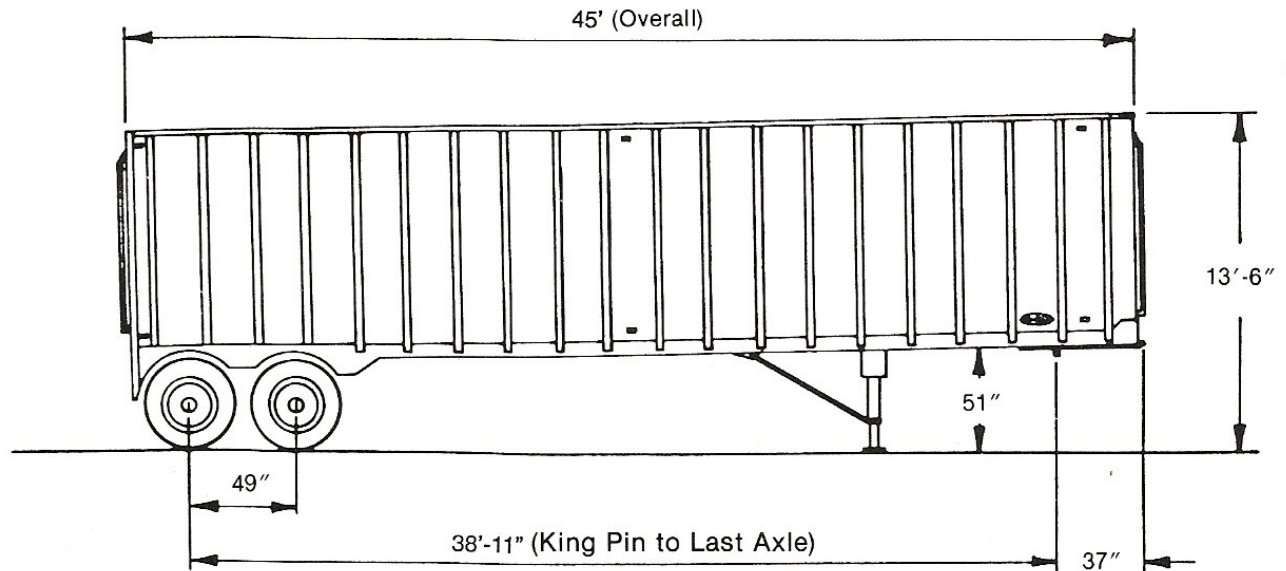

## PEERLESS 45' LIVE FLOOR TRAILER

### STANDARD SPECIFICATIONS

#### DESIGN

Skin stressed aluminum with aluminum exterior posts.

#### CAPACITY

14.5 units (107 cu yd)

#### DIMENSIONS

45' length, 8' width, 13'6" height, 36" rear axle location

#### TIRES

Eight (8) 11:00 x 24.5 radial tires

#### WHEELS

Eight (8) 24.5 x 8.25 - 10 hole, 11 1/4" B.C. hi-tensile steel, unimount Peerless standard production.

#### AXLES

22,500 lbs. capacity, inserted spindles, 72" track, 10 stud, 11 1/4" B.C. hubs, outboard drums, oil seals, quick change brake shoes, auto slacks.

#### BRAKES

16 1/2" x 7" air, 4515 tapered lining, type 3030 air chambers, DOT relay emergency system, dump valve

#### SUSPENSION

Four-spring three-leaf tandem

#### LANDING GEAR

Two speed, crank on driver's side, round fixed position flat feet.

#### KING PIN

Standard SAE, heat treated, 37" setting.

#### CROSS SILLS

I-Beams on 21.5" centers.

#### LIVE FLOOR

24 aluminum channels powered by six (6) 10" stroke hydraulic cylinders.

#### TOP

Box design, open top, single center tie.

#### TARP STORAGE BOX

Located at front of trailer (not furnished if flip top used.)

#### REAR DOOR

Full size, side hinged, double door skinned with galvanized expanded metal

#### REAR BUMPER

Peerless Standard

#### LADDERS

One located at front, one located at rear.

#### ROPE HOOKS

Furnished.

#### MUD FLAPS

Legal rubber

#### WIRING

ATA color code, 7 way ATA receptacle, 12 volt system.

#### LIGHTS

Four legal DOT combination stop, tail and directional lights. Legal DOT clearance lights

#### REFLECTORS

Legal DOT

#### PAINT

Aluminum natural, steel components primed and painted aluminum

#### WEIGHT

Approximately 12,500 Lbs

#### OPTIONS

- \*Solid Top
- \*Solid Removable Top
- \*Peerless Flip Top Cover

#### AVAILABLE

40' to 53' lengths. (Primarily for hauling, loading or unloading feed, seed or fertilizer and forest products.)